

MINIATURE CYLINDER


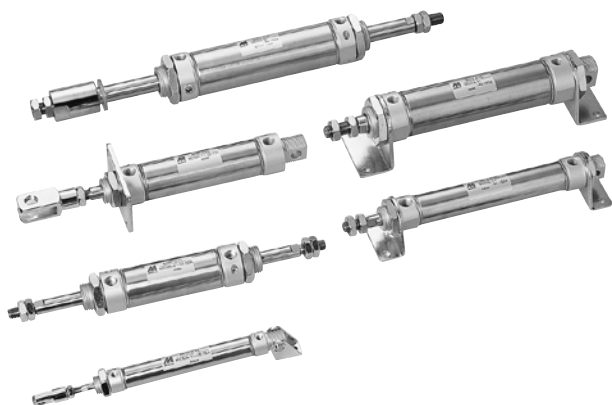


Table for standard stroke

	Tube I.D.	Stroke (mm)
Single acting	ø16	15,25,50,75,100
	ø20, 25, 32	15,25,50,75,100,125,150
Double acting	ø16	15,25,50,75,100,125,150,200,250,300,350,400,450,500
	ø20, 25, 32,40	15,25,50,75,100,125,150,200,250,300,350,400,450,500

- Available with double action type cylinder with stroke more than 500 mm. Sub-piston increases the total length of cylinder by 10 mm and provides further stability.
- Please consult us if stroke out of specification

Order example

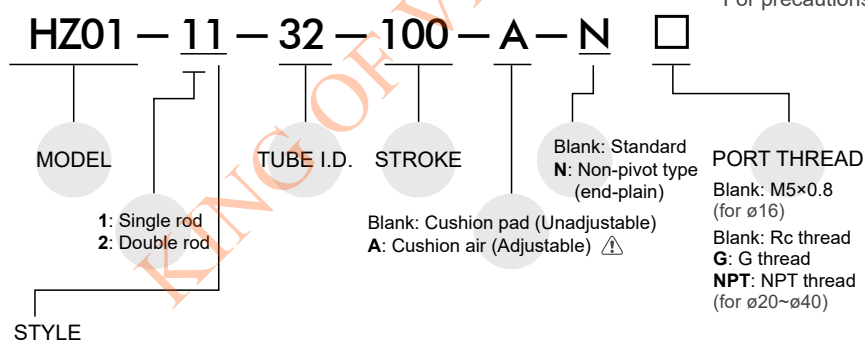

Code	Symbol	Description
1 1		Double acting / Male thread
1 3		Single acting / Normally extended male thread
1 5		Single acting / Normally returned male thread
2 1		Double rod / Male thread
2 3		Single acting / Double rod male thread
2 7		Double rod / Adjustable male thread Please mark "adjustable distance(mm)" at order list

* Order example for special specification, refer to page 0-7

Features

■ Non lubrication

- Special housing and bushing enables self lubrication of piston rod.

■ High quality long service life

- Hard anodised stainless steel cylinder tubes offer a high resistance to corrosion and low internal friction.
- Cylinder mountings, available with a comprehensive range of accessories for rigid or flexible mounting
- Operation, with the exception of MCMA-11, single and doubling type available MCMA-13 / 15.


■ Magnetic as standard

Specificatio

Model	HZ01				
Tube I.D.	16	20	25	32	40
Port size	M5×0.8 Rc1/8				
Medium	Air				
Max. operating perssure	7 Bar				
Min. operating perssure	Double: 0.6 Bar ; Single: 1.5 Bar				
Proof pressure	10 Bar				
Lubricator	Not required				
Ambient temperature	-5~+60°C (No freezing)				
Available speed range	50~750 mm/sec				
Max. allowable kinetic energy (J)	Cushion pad	0.16	0.27	0.4	0.65
	Cushion air	0.32	0.54	0.78	1.27
Sensor switch	RCM (Please refer to page 8-15)				
Sensor switch (band)	BM16	BM20	BM25	BM32	BM40

* For precautions, please refer to page 3-2.


Mounting accessories

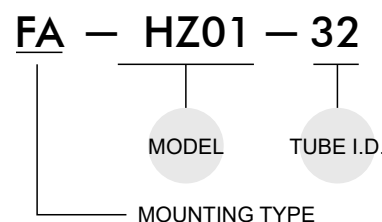

Caution


For (A) Cushion air (Adjustable)

1. To adjust a cushion needle, please slowly turn the needle valve from the fully closed status to the required status whose turns need to be within 2.5 circles.
2. If the needle valve loosen excessively, the buffer can't take effect and the lifetime of cylinder can shorten.



	LB
	FA
	FB
	SDB
	Y
	I
	YS (Y+Floating+PIN)

MINIATURE CYLINDER

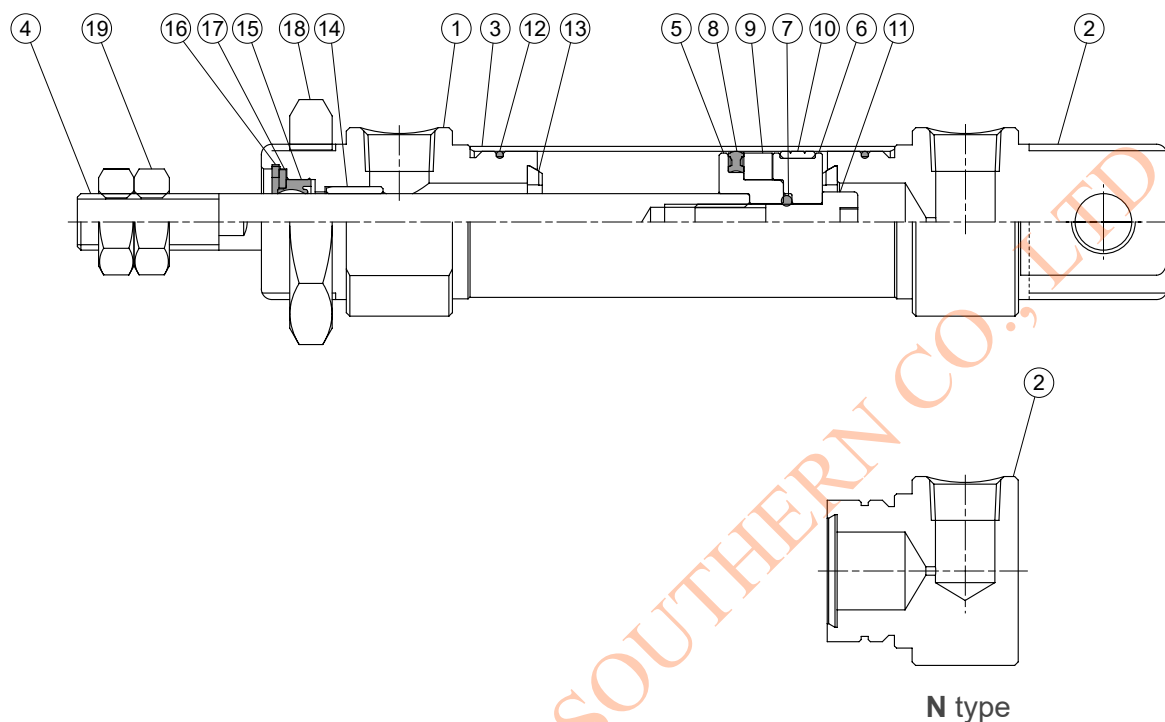

Material

No.	Tube I.D. Part name	16	20	25	32	40	Q'y		Component parts (inclusion)	
							11 type	21 type	11 type	21 type
1	Rod cover		Aluminum alloy				1	2	●	●
2	Head cover		Aluminum alloy				1	—	●	
3	Tube		Stainless steel				1	1		
4	Piston rod	*1	Carbon steel				1	1		
5	Piston-R		Aluminum alloy				1	1	●	●
6	Piston-H		Aluminum alloy				1	1	●	●
7	Piston gasket		NBR				1	1	●	●
8	Piston packing		NBR				1	1	●	●
9	Magnet ring		Magnet material				1	1	●	●
10	Wear ring		POM				1	1	●	●
11	Piston bolt		SCM				1	—	●	
12	Cover ring		NBR				2	2	●	●
13	Cushion gasket		NBR				2	2	●	●
14	Rod bush		Bearing alloy				1	2	●	●
15	Rod packing *2		NBR				1	2	●	●
16	Snap ring		Spring steel				1	2	●	●
17	Washer		Carbon steel				1	2	●	●
18	Tie nut		Carbon steel				1	2	●	●
19	Rod front nut		Carbon steel				2	2	●	●

*1. Stainless steel

*2. Only the rod packing is repairable, please contact our sales if needed.


Order example of Component parts

Tube I.D.	Component parts
ø16	CP-HZ01-16
ø20	CP-HZ01-20
ø25	CP-HZ01-25
ø32	CP-HZ01-32
ø40	CP-HZ01-40

Non-pivot type (End-plain)

Tube I.D.	Component parts
ø16	CP-HZ01-16-N
ø20	CP-HZ01-20-N
ø25	CP-HZ01-25-N
ø32	CP-HZ01-32-N
ø40	CP-HZ01-40-N

MINIATURE CYLINDER

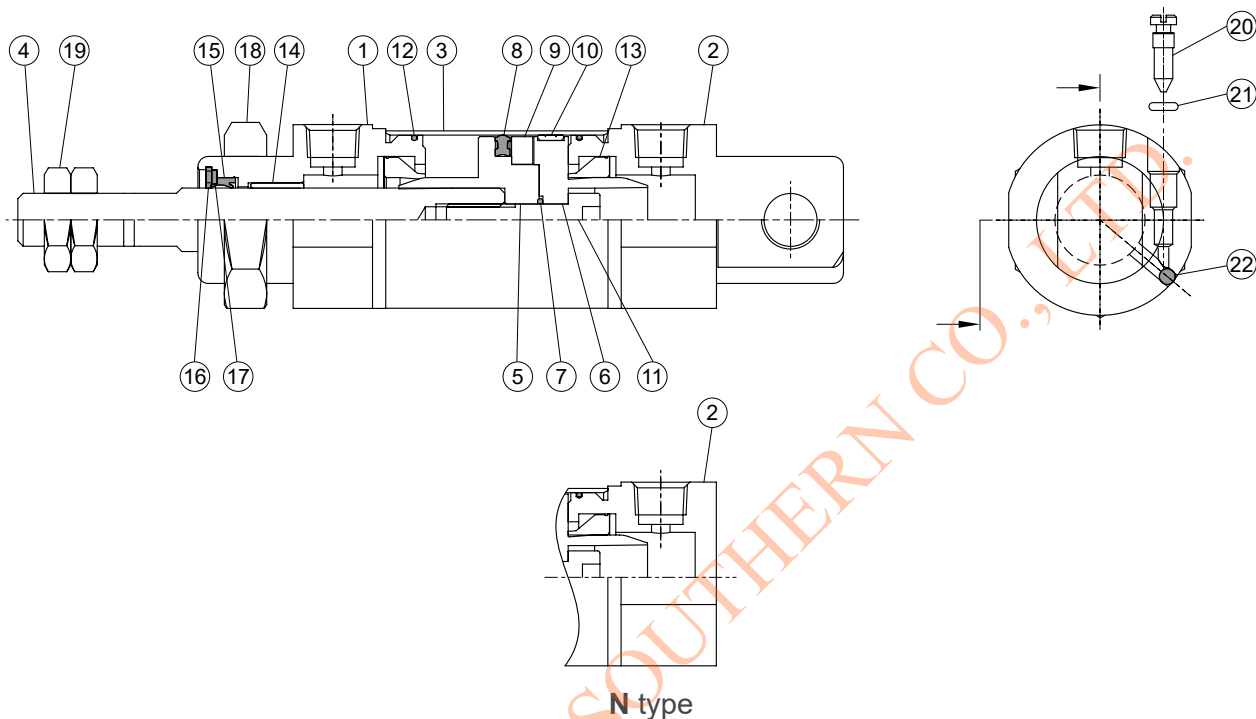

Material

No.	Tube I.D. Part name	16	20	25	32	40	Q'y		Component parts (inclusion)	
							11 type	21 type	11 type	21 type
1	Rod cover	Aluminum alloy				1	2	●	●	
2	Head cover	Aluminum alloy				1	—	●		
3	Tube	Stainless steel				1	1			
4	Piston rod	*1	Carbon steel			1	1			
5	Piston-R	Aluminum alloy				1	1	●	●	
6	Piston-H	Aluminum alloy				1	1	●	●	
7	Piston gasket	NBR				1	1	●	●	
8	Piston packing	NBR				1	1	●	●	
9	Magnet ring	Magnet material				1	1	●	●	
10	Wear ring	POM				1	1	●	●	
11	Piston bolt	SCM				1	—	●		
12	Cover ring	NBR				2	—	●	●	
13	Cushion packing	NBR				2	2	●	●	
14	Rod bush	Bearing alloy				1	2	●	●	
15	Rod packing *2	NBR				1	2	●	●	
16	Snap ring	Spring steel				1	2	●	●	
17	Washer	Carbon steel				1	2	●	●	
18	Tie nut	Carbon steel				1	2	●	●	
19	Rod front nut	Carbon steel				2	2	●	●	
20	Needle valve	Stainless steel	Carbon steel			2	2	●	●	
21	Needle valve packing	NBR				2	2	●	●	
22	Steel ball	Stainless steel				2	2	●	●	

*1. Stainless steel

*2. Only the rod packing is repairable, please contact our sales if needed.


Order example of Component parts

Tube I.D.	Component parts
ø16	CP-HZ01-16A
ø20	CP-HZ01-20A
ø25	CP-HZ01-25A
ø32	CP-HZ01-32A
ø40	CP-HZ01-40A

Non-pivot type (End-plain)

Tube I.D.	Component parts
ø16	CP-HZ01-16A-N
ø20	CP-HZ01-20A-N
ø25	CP-HZ01-25A-N
ø32	CP-HZ01-32A-N
ø40	CP-HZ01-40A-N

MINIATURE CYLINDER

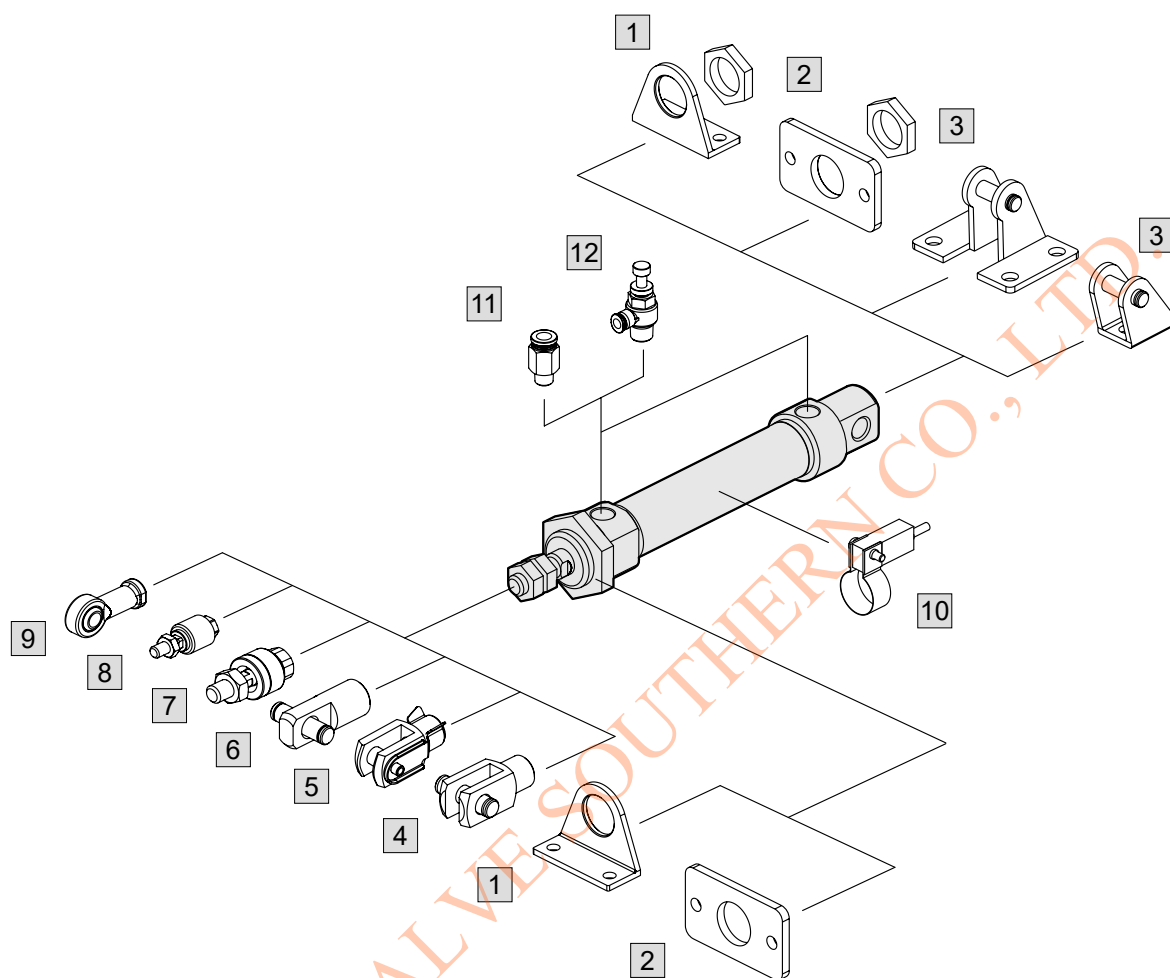


No.	Accessories	Material	Page
1	Mounting accessories LB	Carbon steel	3-8, 12
2	Mounting accessories FA/FB	Carbon steel	3-9, 13
3	Mounting accessories SDB+PIN	Carbon steel	3-9, 13, 14
4	Accessories Y+PIN	Carbon steel	3-14
5	Accessories YS (Y+Floating pin)	Carbon steel	3-14
6	Accessories I+PIN	Carbon steel	3-14


No.	Accessories	Material	Page
7	Floating joint MFC	Carbon steel	8-2
8	Floating joint MFCS	Carbon steel	8-5
9	Female rod ends PHS	Carbon steel	8-6
10	Sensor switch RCM+BM**	—	8-15
11	Fitting PC (PISCO)	—	7-3 (Vol.1)
12	Speed controller JSC (PISCO)	—	7-15 (Vol.1)

MINIATURE CYLINDER


11

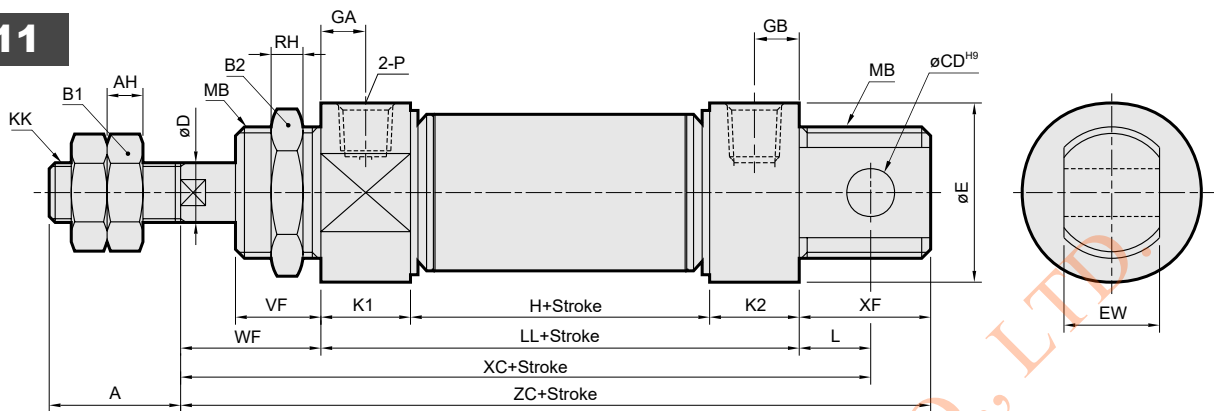

21

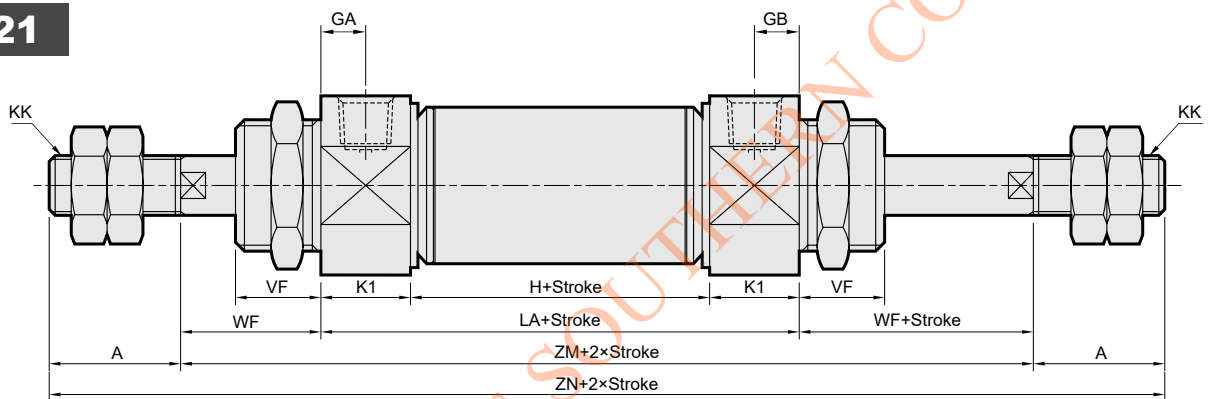

27

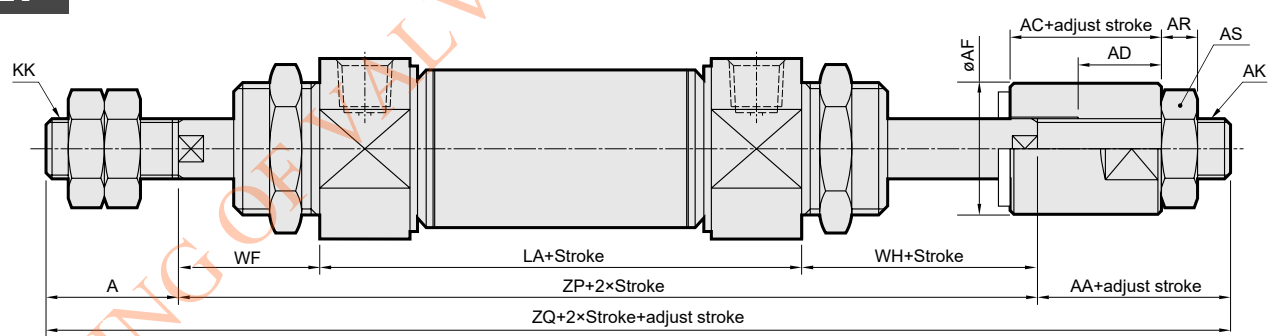


Code Tube I.D.	A	AA	AC	AD	AF	AH	AR	AS	AK	B1	B2	CD	D	E	EW	GA	GB	H	KK
16	16	16	13	7.5	12	5	4	8	M5×0.8	10	22	6	6	19.7	12 ^{-0.05/-0.4}	5	5	34	M6×1.0
20	20	19	15	9.5	16	5	5	13	M8×1.25	13	30	8	8	26.7	16 ^{-0.05/-0.4}	7.5	7.5	40	M8×1.25
25	22	19	15	9.5	16	6	5	13	M8×1.25	17	30	8	10	29.7	16 ^{-0.05/-0.4}	7.5	7.5	40	M10×1.25
32	22	18	12	7	20	6	6	17	M10×1.25	17	32	10	12	36	16 ^{-0.05/-0.4}	7.5	10.5	37	M10×1.25
40	30	18	12	7	30	7	7	19	M12×1.25	19	41	12	14	45	20 ^{-0.05/-0.4}	7.5	10.5	42	M12×1.25

Code Tube I.D.	K1	K2	L	LA	LL	MB	P	RH	VF	WF	WH	XC	XF	ZC	ZM	ZN	ZP	ZQ
16	10	10	9	54	54	M16×1.5	M5×0.8	6	12	22	19.5	85	16	92	98	130	95.5	127.5
20	15	15	12	70	70	M22×1.5	Rc1/8	6	12	18	19.5	100	21	109	106	146	107.5	146.5
25	15	15	12	70	70	M22×1.5	Rc1/8	6	15	27	22.5	109	21	118	124	168	119.5	160.5
32	15	18	14	67	70	M24×2.0	Rc1/8	8	18	30	24	114	24	124	127	171	121	161
40	15	18	16	72	75	M30×2.0	Rc1/8	8	17	27	24	118	28	130	126	186	123	171

MINIATURE CYLINDER


N

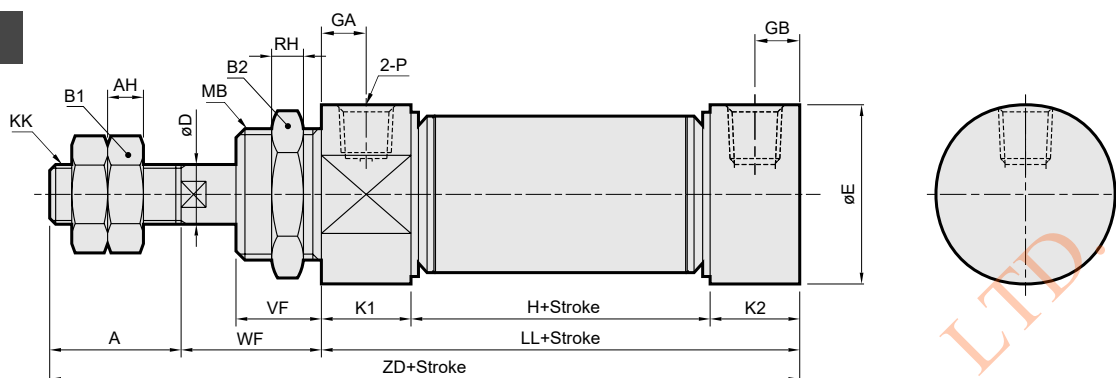

Code Tube I.D.	A	AH	B1	B2	D	E	GA	GB	H	KK	K1	K2	LL	MB	P	RH	VF	WF	ZD
16	16	5	10	22	6	19.7	5	5	34	M6×1.0	10	10	54	M16×1.5	M5×0.8	6	12	22	92
20	20	5	13	30	8	26.7	7.5	7.5	40	M8×1.25	15	15	70	M22×1.5	Rc1/8	6	12	18	108
25	22	6	17	30	10	29.7	7.5	7.5	40	M10×1.25	15	15	70	M22×1.5	Rc1/8	6	15	27	119
32	22	6	17	32	12	36	7.5	10.5	37	M10×1.25	15	18	70	M24×2.0	Rc1/8	8	18	30	122
40	30	7	19	41	14	45	7.5	10.5	42	M12×1.25	15	18	75	M30×2.0	Rc1/8	8	17	27	132

■ Mounting accessories


LB

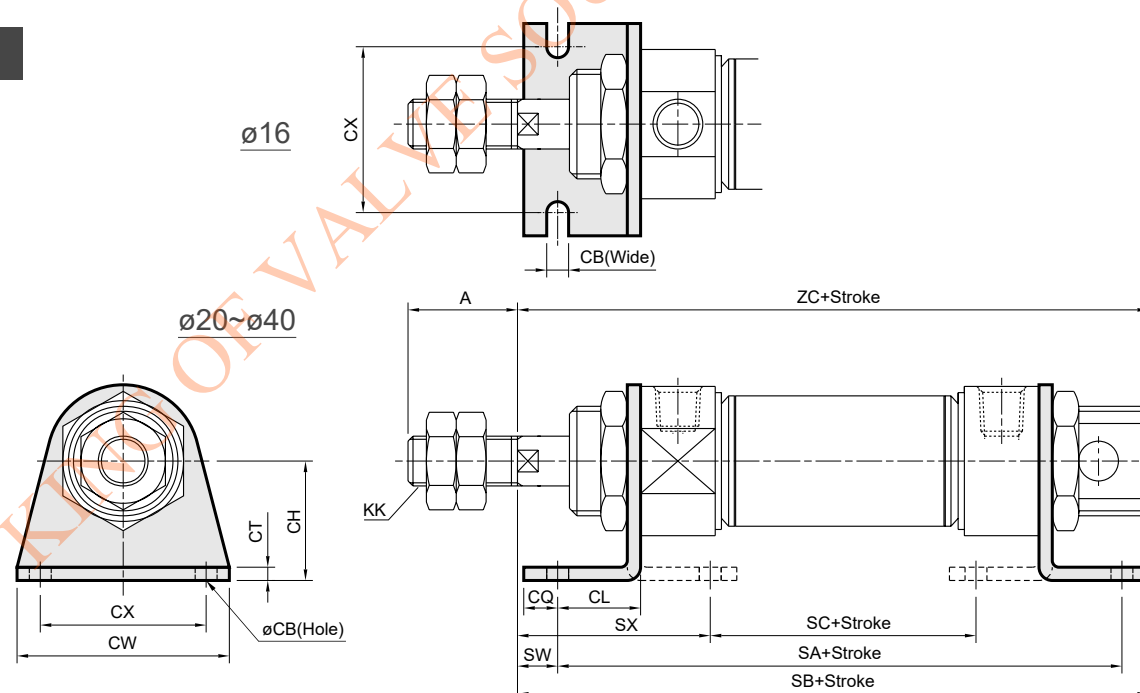




Code Tube I.D.	A	CB	CH	CL	CQ	CT	CW	CX	KK	SA	SB	SC	SW	SX	ZC
16	16	5.5	20	13	6	3.2	44	32	M6×1.0	80	95	34.4	9	31.8	92
20	20	6.6	25	15	8	3.2	54	40	M8×1.25	100	111	46.4	3	29.8	109
25	22	6.6	25	15	8	3.2	54	40	M10×1.25	100	120	46.4	12	38.8	118
32	22	6.6	32	25	8	4	59	45	M10×1.25	120	133	28	5	51	124
40	30	6.6	36	25	8	4	64	50	M12×1.25	125	135	33	2	48	130

MINIATURE CYLINDER


FA/FB

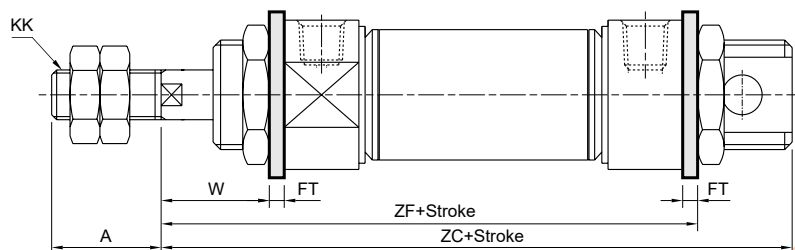



Code Tube I.D.	A	FB	FE	FF	FP	FR	FT	KK	W	ZC	ZF
16	16	5.5	26	52	40	—	3.2	M6×1.0	18.8	92	79.2
20	20	6.6	38	64	50	—	4.5	M8×1.25	13.5	109	92.5
25	22	6.6	38	64	50	—	4.5	M10×1.25	22.5	118	101.5
32	22	6.6	47	72	58	33	4.5	M10×1.25	25.5	124	104.5
40	30	6.6	50	84	70	36	4.5	M12×1.25	22.5	130	105.5

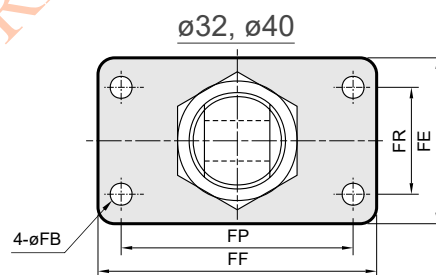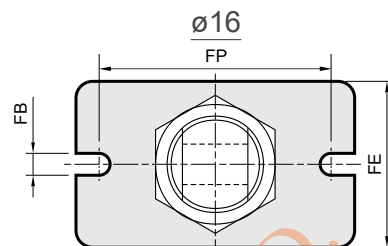

SDB

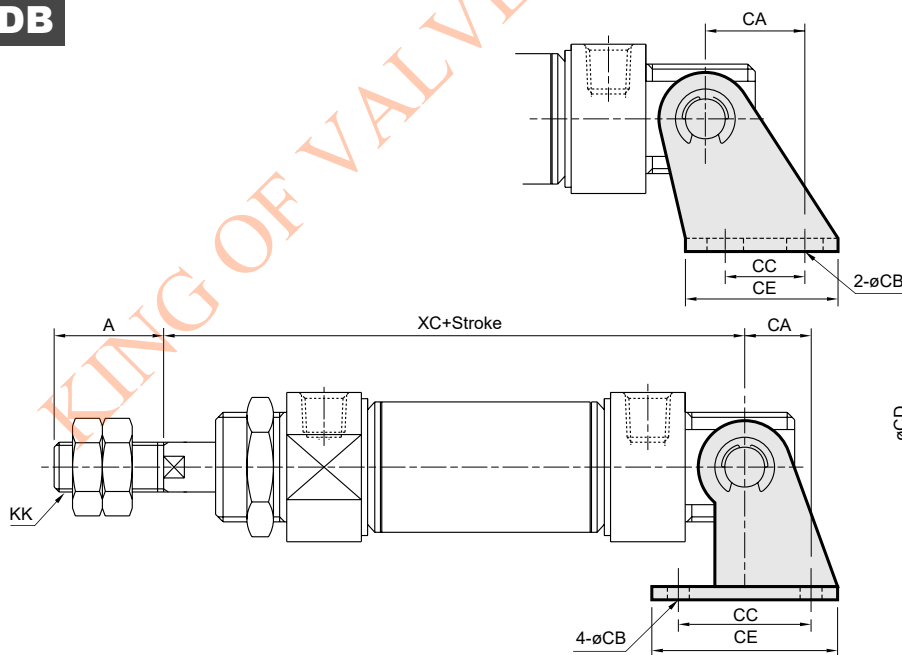

Code Tube I.D.	A	CA	CB	CC	CD	CE	CH	CT	CW	CX	KK	XC
16	16	15	5.5	12	6	23	20	2.3	—	—	M6×1.0	85
20	20	16	6.6	32	8	48	32	3.2	67	51	M8×1.25	100
25	22	16	6.6	32	8	48	32	3.2	67	51	M10×1.25	109
32	22	18	6.6	36	10	52	36	4	67	51	M10×1.25	114
40	30	20	6.6	40	12	56	40	4	69	53	M12×1.25	118




MINIATURE CYLINDER

Installation of sensor switch

Sensor switch: RCM

Sensor switch band: BM**

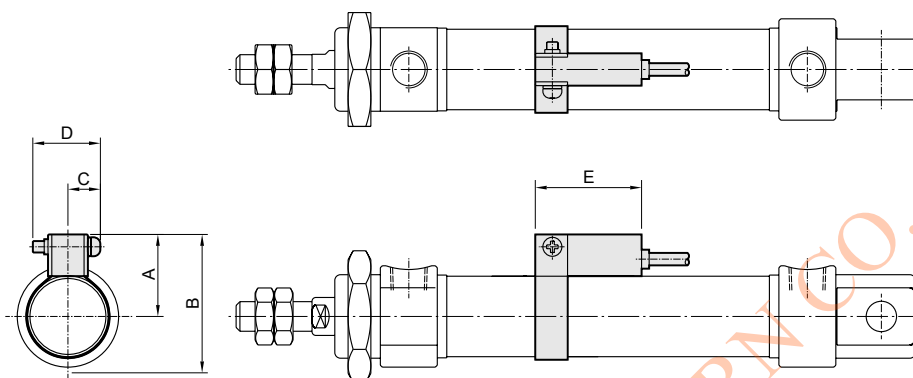

Code Tube I.D.	A	B	C	D	E
16	20	30	10	16	28
20	22	36	10	16	28
25	25	40	10	16	28
32	28	46	10	16	28
40	32	55	10	16	28

■ Cylinder & accessories weight

Cylinder weight

Unit: g

Model	Basic weight HZ01-11	Basic weight HZ01-11-N	Stroke 25 mm HZ01-11	Basic weight HZ01-11-A	Stroke 25 mm HZ01-11-A
Tube I.D.					
ø16	76	70	12	74	13
ø20	178	162	23	159	24
ø25	230	214	30	202	27
ø32	295	277	39	363	39
ø40	496	462	60	506	60


Accessories weight

Unit: g

Model	LB	FA/FB	SDB	Y	I	Pin	YS	Rod nut	Cover nut
Tube I.D.									
ø16	65	25	24	13	15	5	5	2	11
ø20	103	67	103	40	42	10	10	4	20
ø25	103	67	103	72	82	19	18	8	20
ø32	200	95	153	72	72	19	18	8	29
ø40	233	110	184	96	96	33	32	11	47

MINIATURE CYLINDER


15

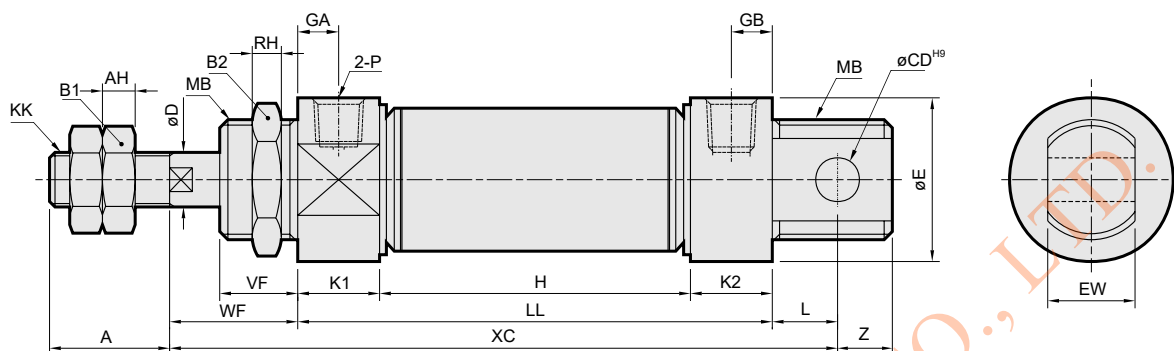

Code Tube I.D.	A	AH	B1	B2	CD	D	E	EW	GA	GB	KK	K1	K2	L	MB	P	RH	VF	WF	Z
16	16	5	10	22	6	6	19.7	12 ^{-0.05/-0.4}	5	5	M6×1.0	10	10	9	M16×1.5	M5×0.8	6	12	22	7
20	20	5	13	30	8	8	26.7	16 ^{-0.05/-0.4}	7.5	7.5	M8×1.25	15	15	12	M22×1.5	Rc1/8	6	12	18	9
25	22	6	17	30	8	10	29.7	16 ^{-0.05/-0.4}	7.5	7.5	M10×1.25	15	15	12	M22×1.5	Rc1/8	6	15	27	9
32	22	6	17	32	10	12	36	16 ^{-0.05/-0.4}	7.5	10.5	M10×1.25	15	18	14	M24×2.0	Rc1/8	8	18	30	10

Code Stroke Tube I.D.	H							LL							XC						
	15	25	50	75	100	125	150	15	25	50	75	100	125	150	15	25	50	75	100	125	150
16	64	74	114	154	194	—	—	84	94	134	174	214	—	—	115	125	165	205	245	—	—
20	80	90	140	190	240	290	340	110	120	170	220	270	320	370	140	150	200	250	300	350	400
25	80	90	140	190	240	290	340	110	120	170	220	270	320	370	149	159	209	259	309	359	409
32	77	87	137	187	237	287	337	110	120	170	220	270	320	370	154	164	214	264	314	364	414


23

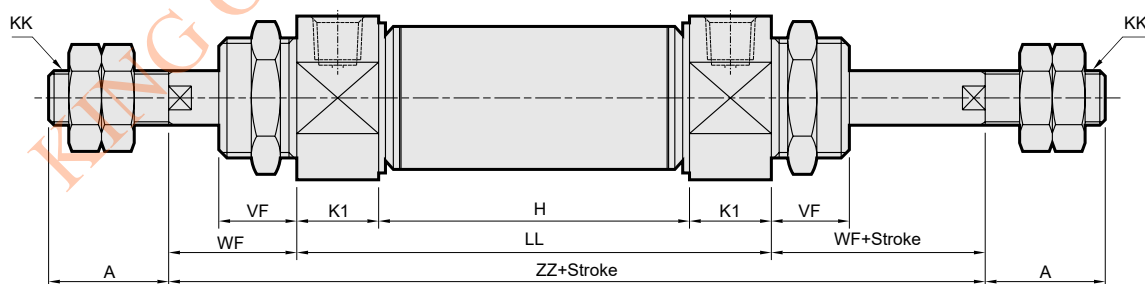

Code Stroke Tube I.D.	H							LL							ZZ						
	15	25	50	75	100	125	150	15	25	50	75	100	125	150	15	25	50	75	100	125	150
16	64	74	114	154	194	—	—	84	94	134	174	214	—	—	125	135	175	215	255	—	—
20	80	90	140	190	240	290	340	110	120	170	220	270	320	370	146	156	206	256	306	356	406
25	80	90	140	190	240	290	340	110	120	170	220	270	320	370	164	174	224	274	324	374	424
32	77	87	137	187	237	287	337	107	117	167	217	267	317	367	167	177	227	277	327	377	427

MINIATURE CYLINDER

LB

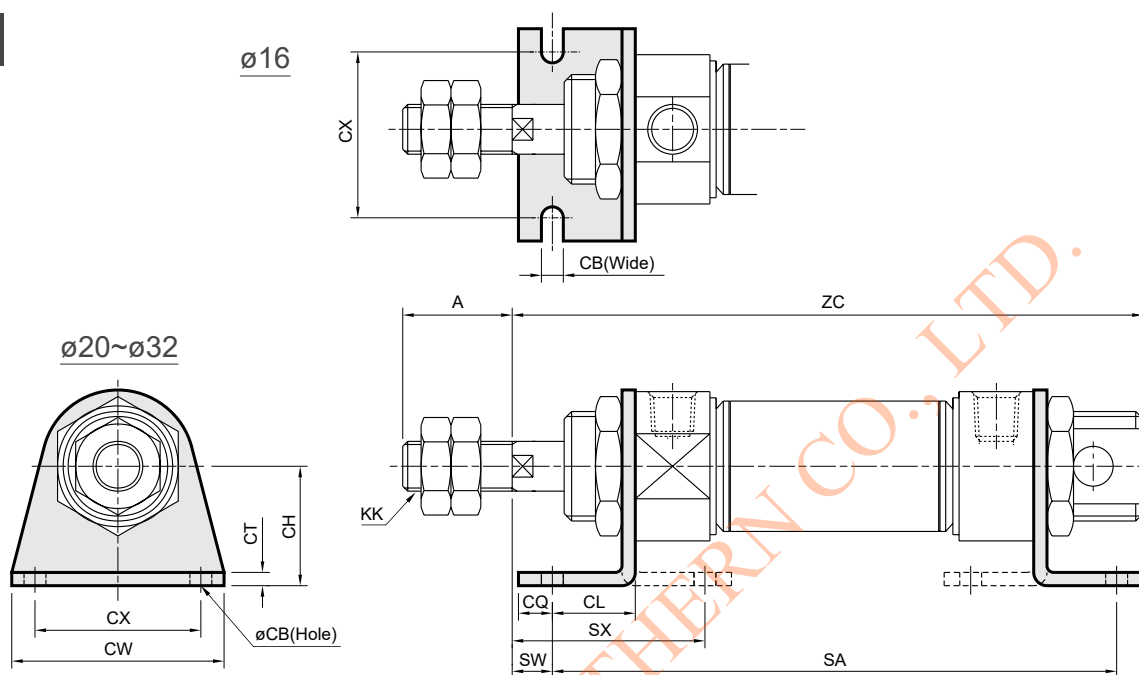


Code Tube I.D.	A	CB	CH	CL	CQ	CT	CW	CX	KK	SW	SX
16	16	5.5	20	13	6	3.2	44	32	M6×1.0	9	31.8
20	20	6.6	25	15	8	3.2	54	40	M8×1.25	3	29.8
25	22	6.6	25	15	8	3.2	54	40	M10×1.25	12	38.8
32	22	6.6	32	25	8	4	59	45	M10×1.25	5	51

Code Stroke Tube I.D.	SA							ZC						
	15	25	50	75	100	125	150	15	25	50	75	100	125	150
16	110	120	160	200	240	—	—	121	131	171	211	251	—	—
20	140	150	200	250	300	350	400	146	156	206	256	306	356	406
25	140	150	200	250	300	350	400	155	165	215	265	315	365	415
32	160	170	220	270	320	370	420	162	172	222	272	322	372	422




MINIATURE CYLINDER

FA/FB




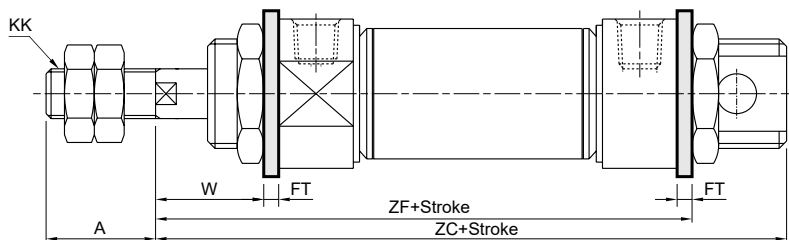


Code	ZC							ZF							
Stroke	15	25	50	75	100	125	150	15	25	50	75	100	125	150	
Tube I.D.	16	121	131	171	211	251	—	—	109.2	119.2	159.2	199.2	239.2	—	—
	20	146	156	206	256	306	356	406	132.5	142.5	192.5	242.5	292.5	342.5	392.5
	25	155	165	215	265	315	365	415	141.5	151.5	201.5	251.5	301.5	351.5	401.5
	32	162	172	222	272	322	372	422	144.5	154.5	204.5	254.5	304.5	354.5	404.5

Code	A	FB	FE	FF	FP	FR	FT	KK	W
Tube I.D.	16	5.5	26	52	40	—	3.2	M6×1.0	18.8
16	16	5.5	26	52	40	—	3.2	M6×1.0	18.8
20	20	6.6	38	64	50	—	4.5	M8×1.25	13.5
25	22	6.6	38	64	50	—	4.5	M10×1.25	22.5
32	22	6.6	47	72	58	33	4.5	M10×1.25	25.5

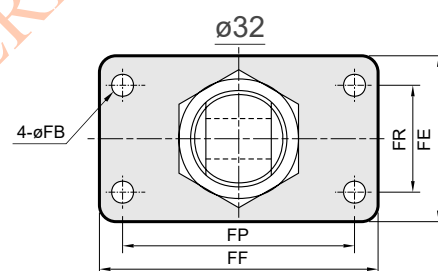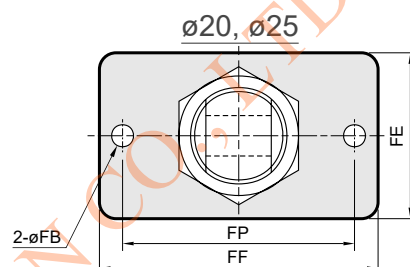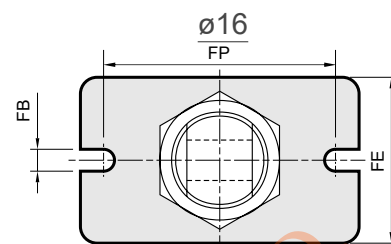

SDB

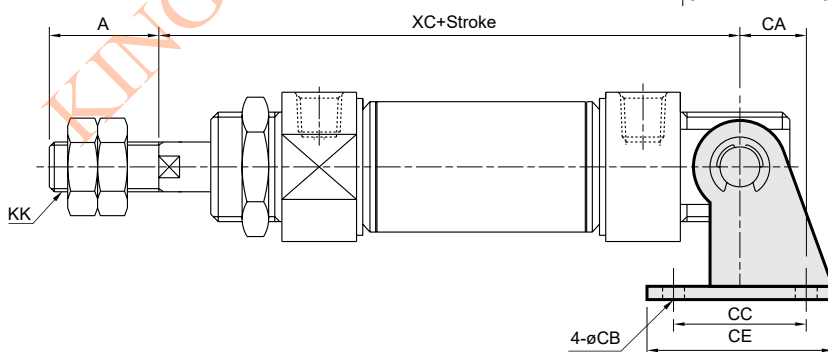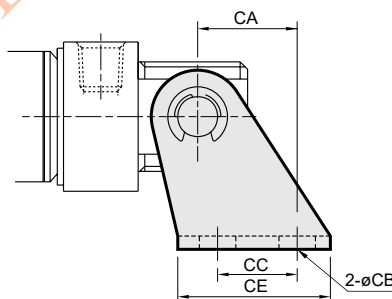


Code	A	CA	CB	CC	CD	CE	CH	CT	CW	CX	KK
Tube I.D.	16	15	5.5	12	6	23	20	2.3	—	—	M6×1.0
16	16	15	5.5	12	6	23	20	2.3	—	—	M6×1.0
20	20	16	6.6	32	8	48	32	3.2	67	51	M8×1.25
25	22	16	6.6	32	8	48	32	3.2	67	51	M10×1.25
32	22	18	6.6	36	10	52	36	4	67	51	M10×1.25


Code	XC						
Stroke	15	25	50	75	100	125	150
Tube I.D.	107	117	157	197	257	—	—
16	107	117	157	197	257	—	—
20	139	149	199	249	299	349	399
25	141	151	172	222	272	322	372
32	142	152	173	223	273	323	373

MINIATURE CYLINDER


Y connector

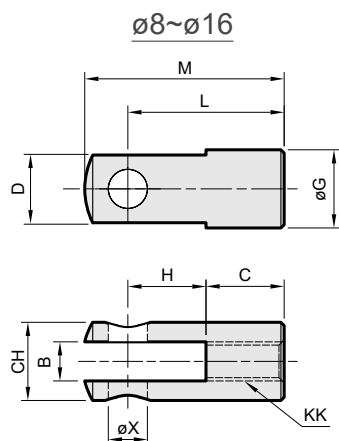

ø20~ø40

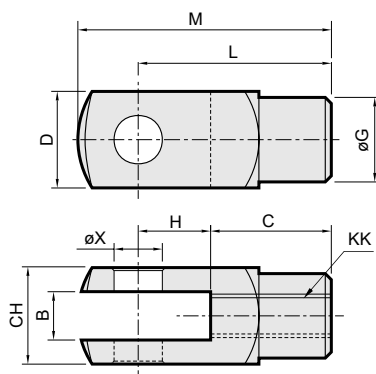

I connector

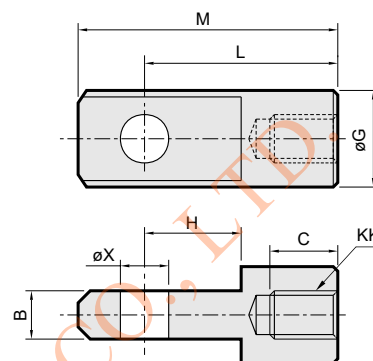

Code	B		C		CH		D		G		H		KK		L		M		X
Tube I.D.	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	
8,10	4 ^{+0.4} _{+0.1}	—	8	—	8	—	8	—	—	—	8	—	M4×0.7	—	16	—	20.75	—	4 ^{+0.1} _{+0.01}
12,16	6 ^{+0.4} _{+0.1}	6 ^{-0.2} _{-0.3}	12	8	12	—	—	—	12	12	12	10	M6×1.0	—	24	21	31	28	6 ^{+0.1} _{+0.01}
20	8 ^{+0.5} _{+0.15}	8 ^{-0.1} _{-0.2}	16	14	16	—	16	—	14	16	16	12	M8×1.25	—	32	32	42	42	8 ^{+0.1} _{+0.01}
25,32	10 ^{+0.5} _{+0.15}	10 ^{-0.1} _{-0.2}	20	17	19	—	19	—	18	20	20	15	M10×1.25	—	40	40	52	52	10 ^{+0.1} _{+0.01}
40	12 ^{+0.5} _{+0.15}	12 ^{-0.1} _{-0.2}	24	21	22	—	22	—	20	24	24	18	M12×1.25	—	48	48	62	62	12 ^{+0.1} _{+0.01}


PIN

* Only for Y connector and ø20~40 tube I.D.


* ø16 tube I.D. use this order: **YS-HZ01-16** & **YS-HZ01-16**.

Order example


PIN — HZ01 — 16 — Y — P

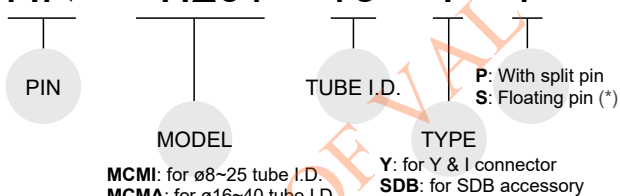

ø8~ø16




ø20~ø40



for Y & I connector

Code	A	B	C	D ^{g9}	DA	E	Split pin
Tube I.D.							
8,10	12	8.5	2	4 ^{-0.03} _{-0.06}	8	0.7	E3
12,16	18.5	15	2	6 ^{-0.03} _{-0.06}	10	0.7	E4
20	24.5	20.5	2.5	8 ^{-0.04} _{-0.08}	12	ø2.5	2.5×16L
25,32	30	25	3.5	10 ^{-0.04} _{-0.08}	14	ø3.2	3.2×20L
40	37	30	5	12 ^{-0.05} _{-0.09}	16	ø3.2	3.2×20L


S

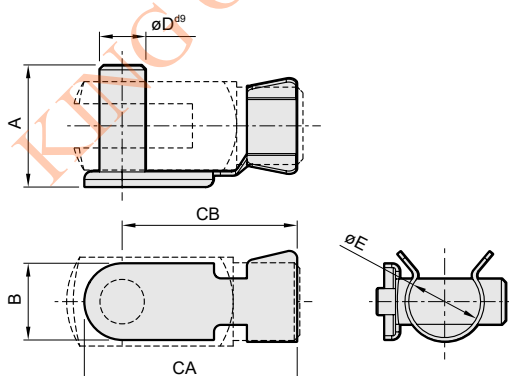

for floating pin

Code	A	B	CA	CB	D ^{g9}	E
Tube I.D.						
16	16	10	28	23	ø6 ^{-0.03} _{-0.06}	9.5
20	22	12	37	31	ø8 ^{-0.04} _{-0.08}	13.5
25,32	26	14	45	38	ø10 ^{-0.04} _{-0.08}	17
40	31	16	54	46	ø12 ^{-0.05} _{-0.09}	19

P

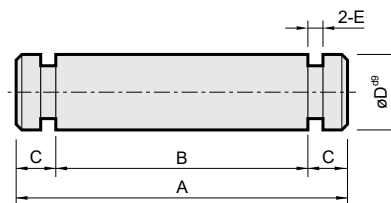

for SDB

Code	A	B	C	D ^{g9}	E	Split pin
Tube I.D.						
8,10	18	14	2	4 ^{-0.03} _{-0.06}	0.7	E3.2
12	23.5	19.5	2	6 ^{-0.03} _{-0.06}	0.7	E5
16	21	17	2	6 ^{-0.03} _{-0.06}	0.7	E5
20,25	30	25	2.5	8 ^{-0.04} _{-0.08}	0.9	E7
32	33	27	3	10 ^{-0.04} _{-0.08}	0.9	E9
40	37	31	3	12 ^{-0.05} _{-0.09}	0.9	E9